

UNI-ROYAL
厚聲集團

DATA SHEET

Product Name Metal Alloy Low Resistance Chip Resistor

Part Name ML05 Series

Uniroyal Electronics Global Co., Ltd.

88#, Longteng Road, Economic & Technical Development Zone, Kunshan, Jiangsu, China

Tel +86 512 5763 1411 / 22 /33

Email marketing@uni-royal.cn

Manufacture Plant Uniroyal Electronics Industry Co., Ltd.

Aeon Technology Corporation

Royal Electronic Factory (Thailand) Co., Ltd.

Royal Technology (Thailand) Co., Ltd.

1. Scope

- 1.1 This specification for approve relates to the Metal Alloy Low Resistance Chip Resistor manufactured by UNI-ROYAL.
- 1.2 Low Resistance / Low TCR
- 1.3 Excellent long term stability
- 1.4 RoHS compliant and halogen free.
- 1.5 Lead free.

2. Part No. System

Part No. includes 14 codes shown as below:

2.1 1st~4th codes: Part name. E.g.: ML05

2.2 5th~6th codes: Power rating.

Wattage	1/2	1
Normal Size	W2	1W

2.3 7th code: Tolerance. E.g.: D=±0.5% F=±1% G=±2% J=±5% K= ±10%

2.4 8th~11th codes: Resistance Value.

2.4.1 If value belongs to standard value of $\geq 5\%$ series, 8th code would be zero, 9th~10th codes are significant figures of the resistance and 11th code is the power of ten.

2.4.2 If value belongs to standard value of $\leq 2\%$ series, 8th~10th codes are significant figures of the resistance, and 11th code is the power of ten.

2.4.3 11th codes listed as following:

$$0=10^0 \quad 1=10^1 \quad 2=10^2 \quad 3=10^3 \quad 4=10^4 \quad 5=10^5 \quad 6=10^6 \quad J=10^{-1} \quad K=10^{-2} \quad L=10^{-3} \quad M=10^{-4} \\ N=10^{-5} \quad P=10^{-6}$$

2.5 12th~14th codes.

2.5.1 12th code: Packaging Type. E.g.: T=Tape/Reel

2.5.2 13th code: Standard Packing Quantity.


5=5000pcs

2.5.3 14th code: Special features.

E = Environmental Protection, Lead Free, or Standard type.

3. Ordering Procedure

(Example: ML05 1W ±1% 1mΩ T/R-5000)

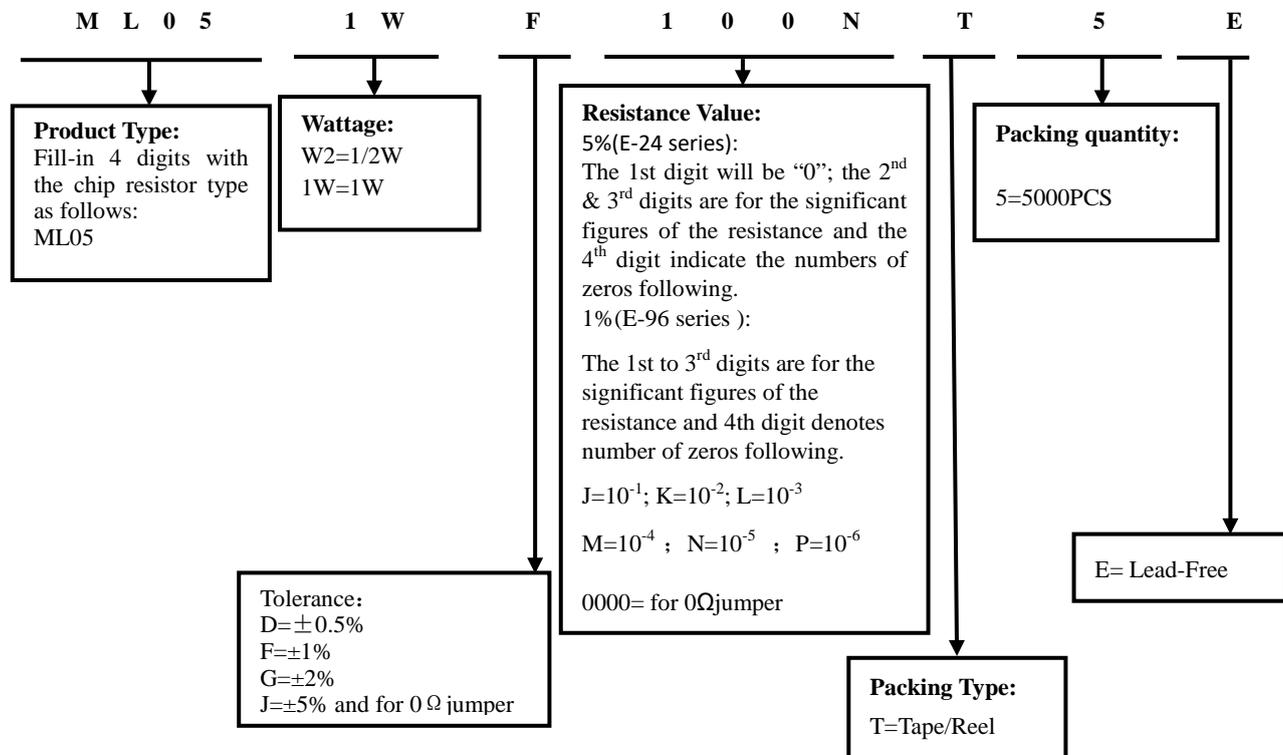

4. Electrical Specifications


5.1 Standard Electrical Specifications

Type	Rating Power	T.C.R. (ppm/°C)	Max. Rating Current (A)	Max. Overload Current (A)	Resistance Range (mΩ)			Operating Temperature Range (°C)
					0.5% (D)	1.0% (F) 2.0% (G) 5.0% (J)		
ML05	1/2W	$\cong \pm 100$	31.62A	70.71A	---	0.5~1	-55°C~+170°C	
		$\cong \pm 75$	18.26A	40.82A	---	1.5~2		
		$\cong \pm 50$	14.14A	31.62A	7~13	2.5~13		
	1W	$\cong \pm 100$	44.72A	89.44A	---	0.5~1		
		$\cong \pm 75$	25.81A	51.63A	---	1.5~2		
		$\cong \pm 50$	20.0A	40.0A	7~13	2.5~13		

5.2 Jumper Specifications

Type	Rating Power	Max. Rating Current	Resistance (mΩ)	Operating Temperature Range (°C)
ML05	1/2W	50A	$\cong 0.2$	-55°C~+170°C
	1W	70.7A		

5. Dimension (Unit:mm)

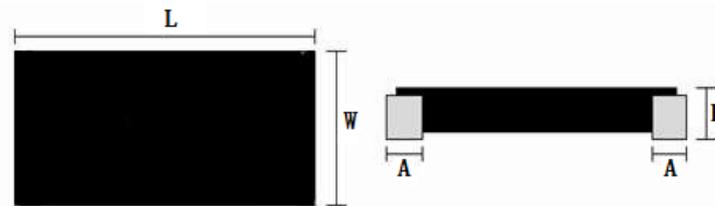

Type	Power Rating	Resistance Range	L	W	H	A
ML05 (0805)	1/2W 1W	0.5mΩ	2.05±0.25	1.30±0.30	0.60±0.20	0.75±0.20
		1mΩ			0.55±0.20	0.40±0.20
		1.5mΩ			0.45±0.20	
		2mΩ			0.35±0.20	
		2.5mΩ			0.45±0.20	
		3~8mΩ			0.35±0.20	
		9~13mΩ			0.37±0.20	


Jumper Dimension

Unit:mm						
Type	Power Rating	Resistance Range	L	W	H	A
ML05 (0805)	1/2W 1W	$\cong 0.2\text{m}\Omega$	2.05±0.25	1.30±0.30	0.45±0.20	0.40±0.20


6. Marking

ML05 products no marking

7. Structure

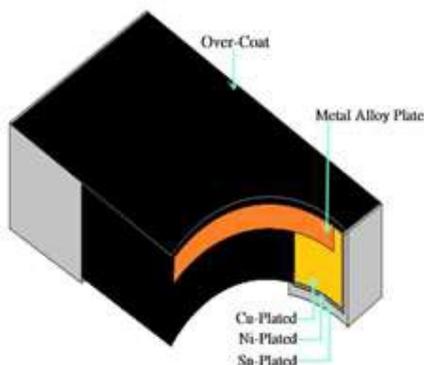


8. Recommend land pattern

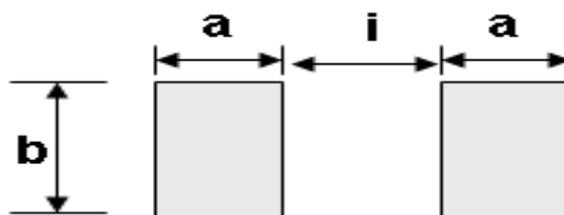

Unit: mm				
Type	Resistance Range	a	b	i
ML05	0.5mΩ	1.35	1.80	0.30
	Jumper / 1mΩ~13mΩ	1.00	1.80	1.00

9. Derating Curve

Resistors shall have a power rating based on continuous load operation at an ambient temperature of 70 °C. For temperature in excess of 70 °C , The load shall be derate as shown in figure 1.

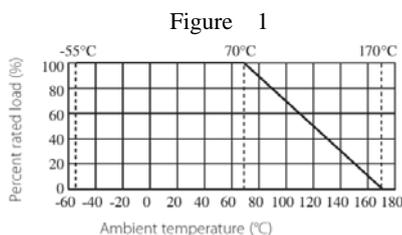

The following equation may be used to determine the DC (Direct Current) or AC (Alternating Current) (RMS, root mean square value) of normal rated power. However, if the result value exceeds the highest current of regulated standards, the highest normal rated power is to be used

$$I = \sqrt{P/R}$$

I = Rating current (A)

P= Rating Power (W)

R= Resistance(Ω)


10. Performance Specification

Test Item	Test Methods (GB/T 5729, JIS-C-5201, IEC 60115-1)	Requirements
Temperature Coefficient	At 25°C /+150°C , 25°C is the reference temperature	List by specification
Short-time overload	4.13 The number of rated power are as follows : ML05-1/2W: 5 times of rated power; ML05-1W: 4 times of rated power; for 5 seconds	$\Delta R \leq \pm 1.0\%$
Load Life	4.25.1 Permanent Resistance change after 1000 hours operating at rated working current or Max .Working Current whichever less with duty cycle of 1.5hours “ON” , 0.5 hour “OFF” at 70±2°C ambient.	$\Delta R \leq \pm 1.0\%$
High Temperature Exposure	MIL-STD-202 108A Exposed to a temperature of 155±2°C for 1000H.	$\Delta R \leq \pm 1.0\%$
Biased Humidity	MIL-STD-202 Method 103 1000 hours 85°C/85%RH. Note: Specified conditions:10% of operating power. Measurement at 24±4 hours after test conclusion.	$\Delta R \leq \pm 0.5\%$
Rapid change of temperature	4.19. 30 min at -55 °C and 30 min at 155°C; 100 cycles	$\Delta R \leq \pm 0.5\%$
Terminal bending	4.33. 2mm , 10Sec	$\Delta R \leq \pm 0.5\%$
Resistance to Solder Heat	4.18 Dip the resister into a temperature of 260±5°C and hold it for a 10±1 seconds.	$\Delta R \leq \pm 0.5\%$
Solderability	4.17 The area covered with a new, smooth, clean, shiny and continuous surface free from concentrated pinholes. Temperature of solder: 245±3°C; Dwell time in solder: 2~3seconds.	>95% Coverage
Dielectric Withstanding Voltage	4.7 Applied 500 VAC for 1 minute , and Limit surge current 50 mA (max.)	No short or burned on the appearance
Terminal Strength	4.16 5N , 10 seconds	No broken

For Jumper


Test Item	Test Methods (GB/T 5729, JIS-C-5201, IEC 60115-1)	Requirements
Short Time Overload	4.13 Permanent resistance change after the application of a potential of 4 times power rate for 5 seconds	$\cong 0.2m\Omega$
Rapid change of temperature	4.19 30 min at -55 °C and 30 min at 155°C; 100 cycles	$\cong 0.2m\Omega$
High Temperature Exposure	MIL-STD-202 108A Exposed to a temperature of 155±2°C for 1000H.	$\cong 0.2m\Omega$
Biased Humidity	MIL-STD-202 Method 103 1000 hours 85°C/85%RH. Note: Specified conditions:10% of operating power . Measurement at 24±4 hours after test conclusion.	$\cong 0.2m\Omega$
Load Life	4.25 Permanent Resistance change after 1000 hours operating at rated working current or Max .Working Current whichever less with duty cycle of 1.5hours “ON” , 0.5 hour “OFF” at 70±2°C ambient.	$\cong 0.2m\Omega$
Solderability	4.17 The area covered with a new, smooth, clean, shiny and continuous surface free from concentrated pinholes. Temperature of solder : 245±3°C; Dwell time in solder: 2~3 seconds.	>95% coverage

11. Soldering Profile

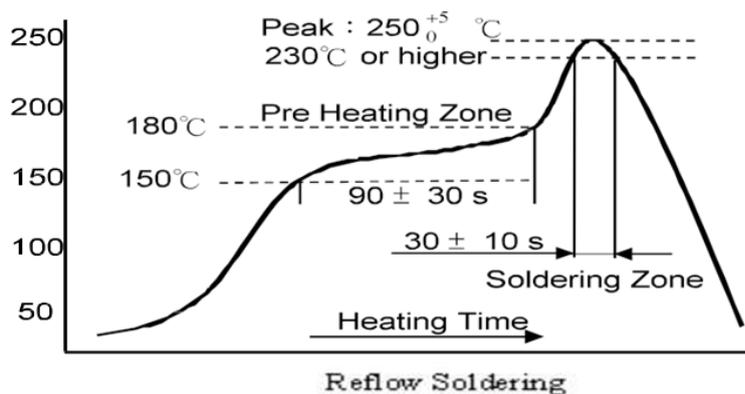


12. Packing of Surface Mount Resistors

12.1 Embossed Dimensions:(Unit: mm)

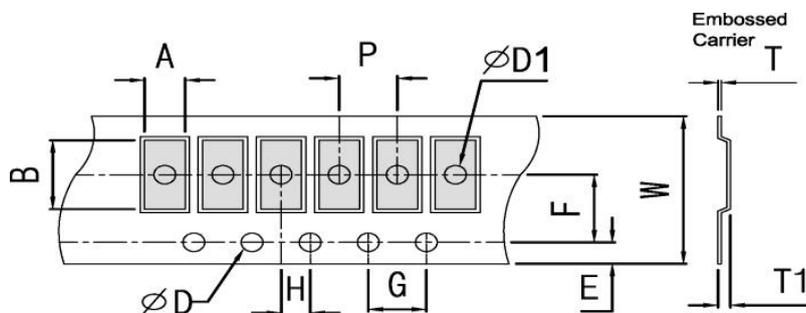

Type	Resistance Range	W	P	E	F	φD	φD1	G	H	A	B	T1	T
ML05	0~2.5mΩ	8.0±0.30	4.0±0.10	1.75±0.10	3.5±0.10	1.50 $_{0}^{+0.1}$	1.0±0.10	4.0±0.10	2.0±0.10	1.70±0.10	2.45±0.10	0.90±0.25	0.20±0.05
ML05	3~13mΩ	8.0±0.30	4.0±0.10	1.75±0.10	3.5±0.10	1.50 $_{0}^{+0.1}$	1.0±0.10	4.0±0.10	2.0±0.10	1.70±0.10	2.45±0.10	0.55±0.25	0.20±0.05

12.2 Dimension of Reel : (Unit: mm)

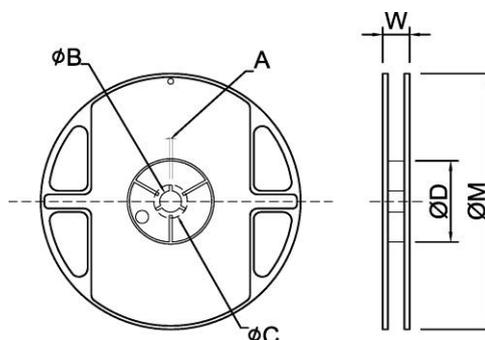

Type	Taping	Qty/Reel	A	φB	φC	φD	W	φM
ML05	Embossed	5,000pcs	2.0±0.5	13.2±0.5	17.7±0.5	60.0±0.5	12.0±0.5	178±1.0

13. Note

- 13.1 UNI-ROYAL recommend products store in warehouse with temperature between 15 to 35°C under humidity between 25 to 75%RH.
 Even under UNI-ROYAL recommended storage condition, solderability of products over 1 year old. (Put condition for each product) may be degraded.
- 13.2 Store / transport cartons in the correct direction, which is indicated on a carton as a symbol.
 Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.
- 13.3 Product performance and soldered connections may deteriorate if the products are stored in the following places:
- Storage in high Electrostatic.
 - Storage in direct sunshine、rain and snow or condensation.
 - Where the products are exposed to sea winds or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, NO₂, Br. etc.

14. Record

Version	Description	Page	Date	Amended by	Checked by
1	First version	1~7	Apr.29, 2021	Haiyan Chen	Yuhua Xu

© Uniroyal Electronics Global Co., Ltd. All rights reserved. Specification herein will be changed at any time without prior notice